


475 Barell Ave., Carlstadt, NJ 07072 Voice: 800-230-9497, 201-549-1160 Fax: 201-549-1161

QolorFLEX 3528-12-NW-60-5-20-1 is an interior grade LED Tape with a medium output (330 lumens/meter) brightness. The natural white color (4100°K) makes it perfect for displays or light box use- where good color rendition is needed. It is available in full 5 meter spools, sample strips and is included in our QolorFLEX Demo Kit.

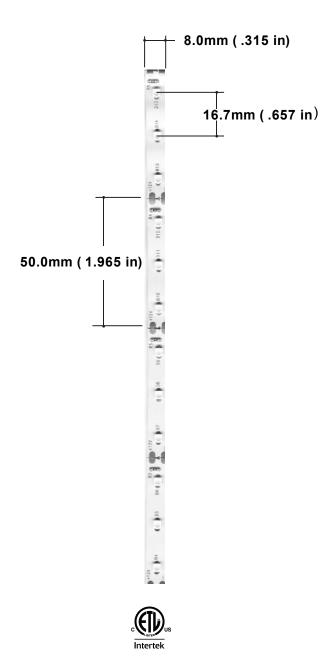

QolorFLEX LED Tape P/N 3528-12-NW-60-5-20-1

SPECIFICATIONS

Color(s)	Natural White
Color Temp	4100° K
Wavelength	N/A
Beam Angle	120°
Brightness (lumens/m)	330
Power Consumption (watts/5m)	24
Power Consumption (watts/ft)	1.46
Operating Voltage	12VDC
Current (mA/5m)	2000
Quantity of LEDs Per 5m (16.4 ft)	300
CRI	70
LED Spacing	16.7mm
LED Spacing Cutting Increment	
	16.7mm
Cutting Increment	16.7mm 50.0mm
Cutting Increment	16.7mm 50.0mm 5m (16.4 ft)
Cutting Increment Length Width	16.7mm 50.0mm 5m (16.4 ft) 8mm
Cutting Increment Length Width Average Life	16.7mm 50.0mm 5m (16.4 ft) 8mm 25,000 hrs
Cutting Increment Length Width Average Life Compliance	16.7mm 50.0mm 5m (16.4 ft) 8mm 25,000 hrs ETL
Cutting Increment Length Width Average Life Compliance Warranty	16.7mm 50.0mm 5m (16.4 ft) 8mm 25,000 hrs ETL Two Years
Cutting Increment Length Width Average Life Compliance Warranty IP Rating	16.7mm 50.0mm 5m (16.4 ft) 8mm 25,000 hrs ETL Two Years IP20